
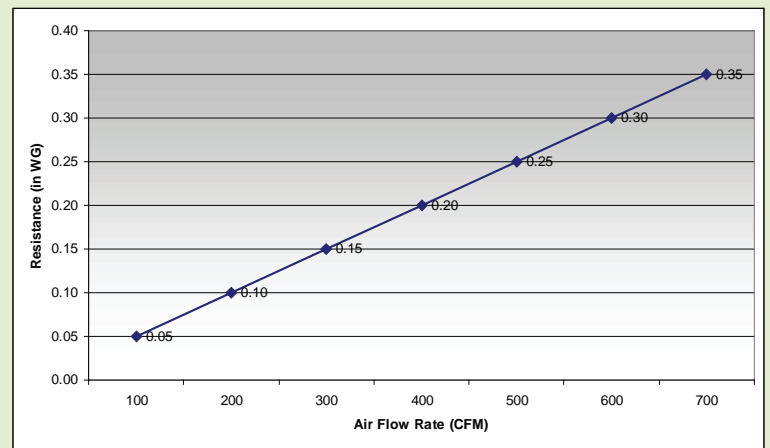


High Temperature Filters

LH1000

- High temperature filtration of recirculated air in curing ovens
- Glass fiber media enclosed in expanded metal protection grid
- Two-stage filtration
- High-humidity applications
- 30 per carton

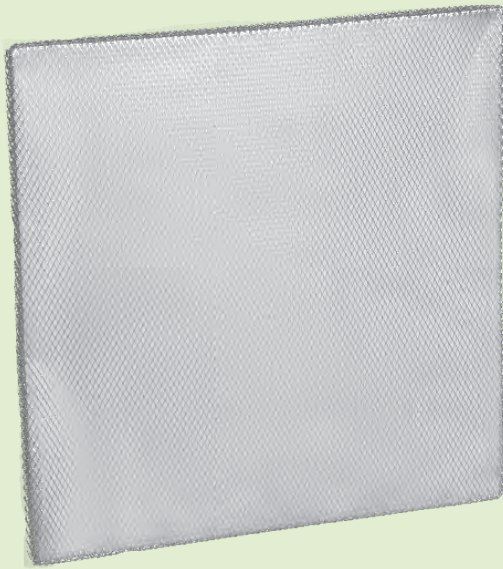

Performance	Unit	LH1000
Rated Air Flow	CFM	600
Initial Resistance	"w.g.	.30
Max Temperature	°F	575 °F
Final Resistance	"w.g.	1.0
Weight	oz.	10
Depth	in"	.55